



Series 40 G120 - G750


On-Off • 38 - 750 MBTUH

Series 40 G900

2-Stages • 250 - 900 MBTUH

Gaz Naturel - Propane

Données Techniques

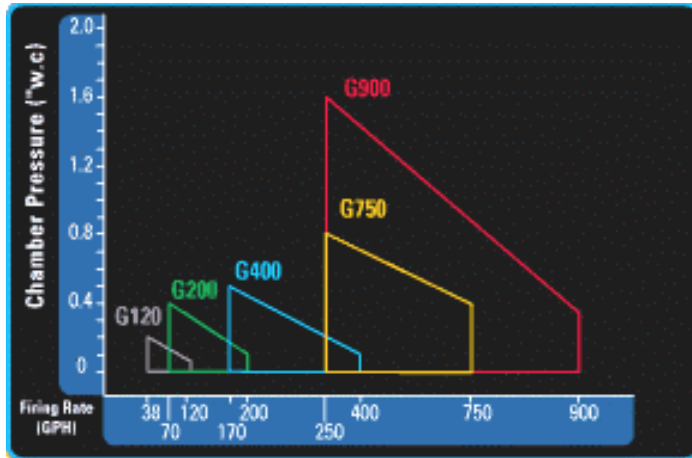


Modèle	On-Off								2-Stage	
	G120		G200		G400		G750		G900	
Combustible	Naturel	Propane	Naturel	Propane	Naturel	Propane	Naturel	Propane	Naturel	Propane
Niveau de puissance Btuh x 1,000	38 - 120		70 - 200		170 - 400		250 - 750		250-490 ¹ 360-900 ²	
Pression de gaz Manifold (\"w.c.) min.- max.	.52-2.05	.51-1.87	.7-1.84	.9-2.96	.9-1.8	1.04- 3.04	1.4-2.1	1.0-3.0	.55-1.1 ¹ 2.3-3.3 ²	1.7-3.4 ¹ 2.6-6.0 ²
Brûleur Pression alimentation (\"w.c.) min.- max.	4 - 10	8 - 13	4 - 10	8 - 13	4 - 10	8 - 13	7 - 14	8 - 13	7 - 14	8 - 13
Moteurs Info	120v 60Hz 2.2amp 3250rpm						120v 60Hz 4.3amp 3250rpm			

1) Bas Feu (2) Haut Feu



Les brûleurs Serie-40 sont approuvés CSA, CGA et AGA

Dimensions

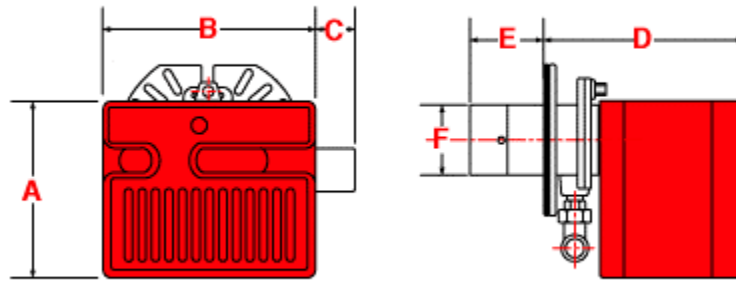

Model		On-Off				2-Stage
		G120	G200	G400	G750	G900
A		8 ¹ / ₂ " (215mm)	9 ³ / ₁₆ " (233mm)	10 ⁵ / ₁₆ " (262mm)	11 ³ / ₄ " (298mm)	11 ³ / ₄ " (298mm)
B		9 ¹⁵ / ₁₆ " (252mm)	10 ¹¹ / ₁₆ " (272mm)	12" (305mm)	13 ³ / ₄ " (350mm)	13 ³ / ₄ " (350mm)
C		1 ³ / ₈ " (35mm)	1 ³ / ₈ " (35mm)	1 ³ / ₈ " (35mm)	N/A	3 ³ / ₄ " (95mm)
D		9 ¹ / ₁₆ " (230mm)	11 ⁵ / ₈ " (295mm)	13 ¹¹ / ₁₆ " (347mm)	15 ⁵ / ₁₆ " (389mm)	15 ⁵ / ₁₆ " (389mm)
E	SBT Bride Fixe	3 ³ / ₈ " (85mm)	3 ³ / ₈ " (85mm)	3 ³ / ₄ " (95mm)	4 ¹ / ₈ " (105mm)	4 ¹ / ₈ " (105mm)
	LBT	10" (255mm)	10" (255mm)	10" (255mm)	10 ⁵ / ₈ " (270mm)	10 ⁵ / ₈ " (270mm)
F		3 ⁹ / ₁₆ " (91mm)	3 ⁹ / ₁₆ " (91mm)	4 ¹ / ₈ " (105mm)	4 ¹⁵ / ₁₆ " (125mm)	4 ¹⁵ / ₁₆ " (125mm)