




Série-40 F3 - F20
 On-Off • 0.5 - 6.4 GPH
 70 - 896 MBTUH


Huile

Donnée Techniques

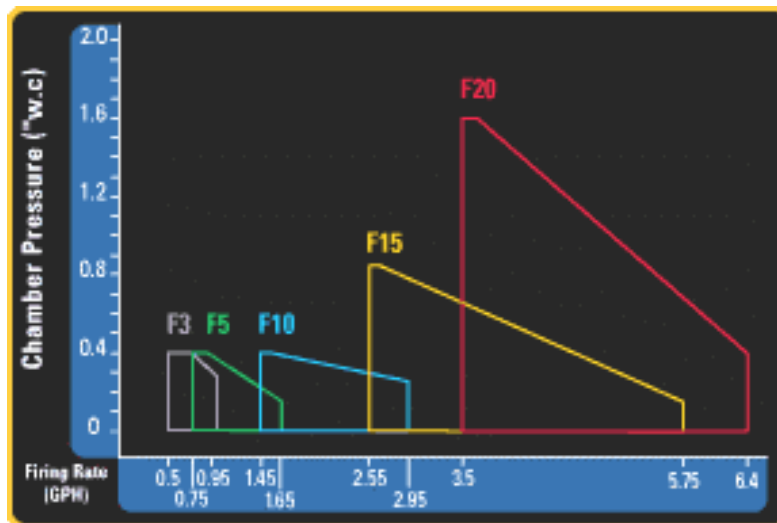

Modèle		F3	F5	F10	F15	F20
Puissance De chauffe	GPH	0.50 - 0.95	0.75 - 1.65	1.45 - 2.95	2.55 - 5.75	3.50 - 6.40
	Btuh x 1,000	70 - 133	105 - 231	203 - 413	357 - 805	490 - 896
	kW/hr	20 - 39	30 - 67	59 - 121	104 - 236	143 - 263
Qualité d'huile	Pas plus de No.2 (Pompe pour kérosène en option)					
Moteur	120v 60Hz 3250rpm					
	2.2amp			4.3amp		
Pression de la pompe (min-max)	120 - 200 psi					

Dimensions

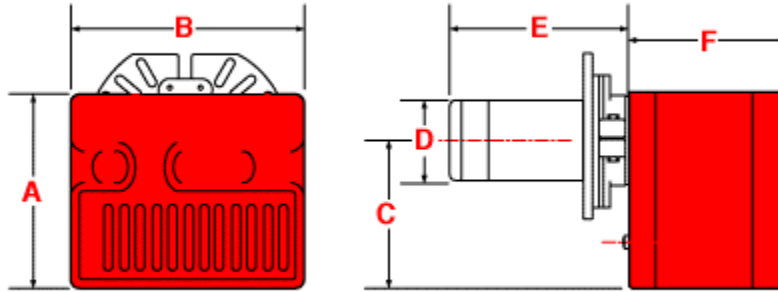

Model		F3	F5	F10	F15	F20
A		8 ^{1/2} " (215mm)	9 ^{3/16} " (233mm)	10 ^{5/16} " (262mm)	11 ^{3/4} " (298mm)	11 ^{3/4} " (298mm)
B		9 ^{15/16} " (252mm)	10 ^{11/16} " (272mm)	12" (305mm)	13 ^{3/4} " (350mm)	13 ^{3/4} " (350mm)
C		6 ^{1/2} " (164mm)	7 ^{1/16} " (180mm)	8 ^{1/16} " (204mm)	9 ^{1/16} " (230mm)	9 ^{1/16} " (230mm)
D		3 ^{1/2} " (89mm)	3 ^{1/2} " (89mm)	4 ^{1/8} " (105mm)	4 ^{11/16} " (119mm)	4 ^{11/16} " (119mm)
E*	VSBT	5 ^{1/2} " (140mm)	5 ^{1/2} " (140mm)	N/A	N/A	N/A
	SBT	8" (203mm)	8" (203mm)	7" (178mm)	7" (178mm)	7" (178mm)
	LBT	12" (305mm)	12" (305mm)	12" (305mm)	12" (305mm)	12" (305mm)
	OEM (Custom)	Other combustion head lengths available on request				
F		7 ^{1/4} " (184mm)	7 ^{13/16} " (199mm)	8 ^{11/16} " (221mm)	10" (254mm)	10" (254mm)

*La Longueur de tube utilisable peu variée jusqu'à 1^{5/8}" selon le type de bride sélectionnée.