


RL/2 28 - 50
2-Stage • 2.6 - 16 GPH

Huile


Données techniques

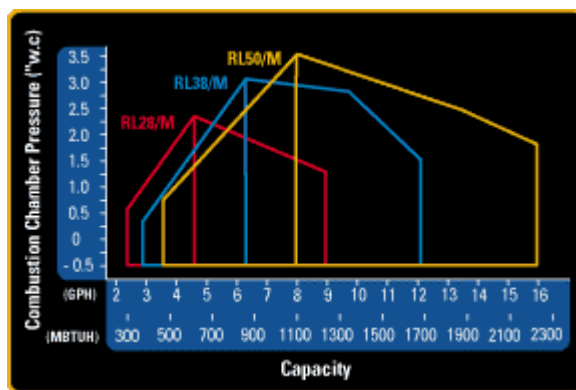

RL/2	Model			
Capacité (GPH) / MBTUH ⁽¹⁾		2.4 - 9.0 / 336 - 1260	2.7 - 12.2 / 378 - 1708	3.5 - 16.0 / 490 - 2240
Moteur d'air combustion	Voltage ⁽²⁾⁽³⁾	120/1/60	230 - 460 - 575/3/60	230 - 460 - 575/3/60
	HP	1/2	3/4	3/4
	Ampérage	5.2	3.2 / 1.6 / 1.3	3.2 / 1.6 / 1.3
Niveau de bruit	dB(A)	68.0	70.0	75.0
Pression chambre de combustion Max. (\"w.c.) @ haut feu		1.5	1.6	1.8

(1) Données basées sur 140,000 Btu/Gallon pour l'huile No.2
 (2) Autres voltages disponibles sur demande.
 (3) Une alimentation séparée 120/1/60 est requise pour le contrôle.

Dimensions

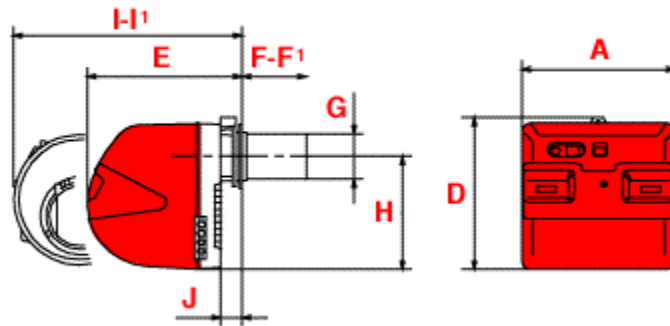

RL/2	28	38	50
A	18 ^{23/32} " (475mm)	18 ^{23/32} " (475mm)	18 ^{23/32} " (475mm)
B	-	-	-
C	-	-	-
D	18 ^{21/32} " (473mm)	18 ^{21/32} " (473mm)	18 ^{21/32} " (473mm)
E	18 ^{13/32} " (467mm)	18 ^{13/32} " (467mm)	18 ^{13/32} " (467mm)
F - F ^{1*}	8 ^{1/2} " (215mm) - 13 ^{13/16} " (350mm)	8 ^{1/2} " (215mm) - 13 ^{13/16} " (350mm)	8 ^{1/2} " (215mm) - 13 ^{13/16} " (350mm)
G	5 ^{1/2} " (139mm)	5 ^{1/2} " (139mm)	5 ^{31/32} " (151mm)
H	13 ^{27/32} " (351mm)	13 ^{27/32} " (351mm)	13 ^{27/32} " (351mm)
I - I ¹	26 ^{15/32} " (672mm) - 31 ^{3/4} " (806mm)	26 ^{15/32} " (672mm) - 31 ^{3/4} " (806mm)	26 ^{15/32} " (672mm) - 31 ^{3/4} " (806mm)
J	2 ^{1/16} " (52mm)	2 ^{1/16} " (52mm)	2 ^{1/16} " (52mm)

*F¹ Longueur avec extension de tête de combustion longue.